

## PREHEATER

## PREHEATER



### FOR CYLINDERS AND MANIFOLDS

INDUSTRIAL  
GASES



Made of chrome-plated brass, cover made of plastic. Suitable for inert gases. Not suitable for comburent, corrosive, flammable gases. Its powerful heat-exchanging capacity can prevent any frosting effect on pressure regulators mounted downstream.

This item is in compliance to Directive 2006/95 / EC (low voltage directive) and Directive 2004/108 / ECB(EMC directive).

### APPLICATIONS:

- Technical applications;
- Automation;
- Industrial processes;
- Welding and laser cutting machines;

### FUNCTION


Complete with two thermostats: the main, automatic one, set at 70°C. The second one is for safety, set at 80°C, with manual reset. A red light is on when electric resistance is powered.

### MATERIALS

<b>Body</b>	Chrome-plated brass
<b>Cover</b>	PA 6.6 +FV30%
<b>Connections</b>	Chrome-plated brass
<b>O-ring</b>	EPDM

### TECHNICAL DATA

<b>P. max Inlet</b>	330 Bar
<b>Power</b>	200 W
<b>Voltage</b>	230 WATT
<b>Weight</b>	2,3 kg / 5,00 lb
<b>Working temp.</b>	-40°C to +150°C
<b>Ingress protection</b>	IP20
<b>Connections</b>	ISIS02503 – ISO5171

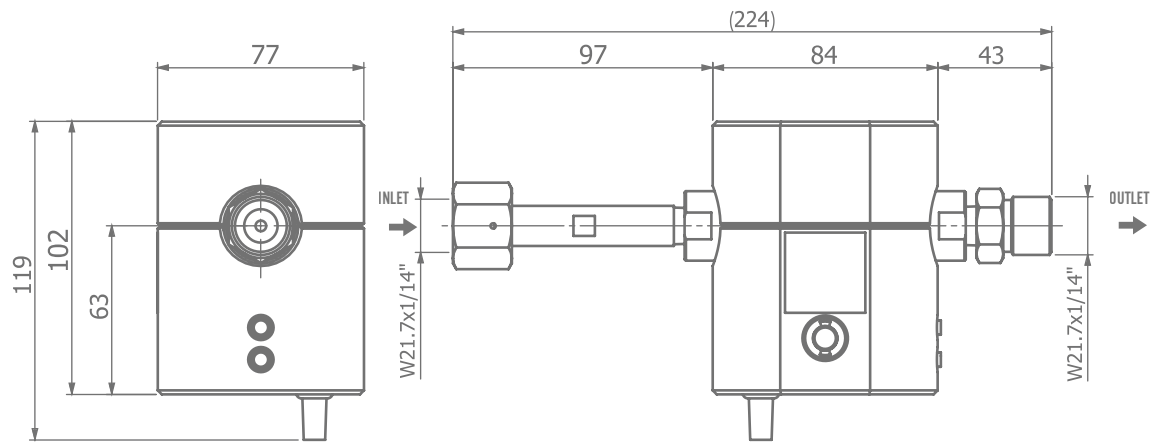

## OPTIONALS

- Bracket Cod. SSTSPR01003