

DECOMPRESSION UNITS

ENO 20

DECOMPRESSION UNIT TWO-STAGE LOW PRESSURE

INDUSTRIAL
GASES



Specifically designed for oenological applications, food and even chemical industries. This unit is for blanketing tanks by inert gas, in order to prevent oxidation of the content.

Easy bottle connection.

APPLICATIONS:

- Blanketing

FEATURES:



- Spring loaded diaphragm;
- Recommended for non-corrosive gases;
- Suitable for oxygen use;

COMPOSITION

Nr 2 Inlet valves with non-return system
Nr 1 High Pressure regulator with overpressure valve
Nr 1 Pressure regulator II° stage
Nr 1 Gauge inlet pressure
Nr 1 Gauge pressure outlet high pressure regulator
Nr 1 Gauge outlet pressure

TECHNICAL DATA

P. max Inlet	220 Bar
Range pressure out	15-40 mbar
Materials first stage	Brass / Diaphragm of NBR
Materials second stage	Aluminium / Diaphragm of NBR
Temperature	20°C to +60°C
Flow	60 Nm ³ /h a 25 mbar
Inlet Connection	to bottle according to 2-UNI11144
Outlet Connection	1" GF by 3-piece connection

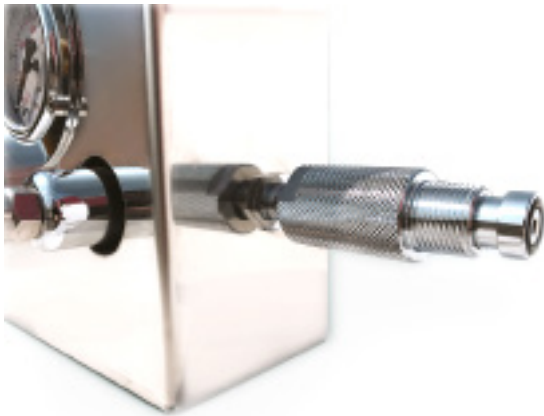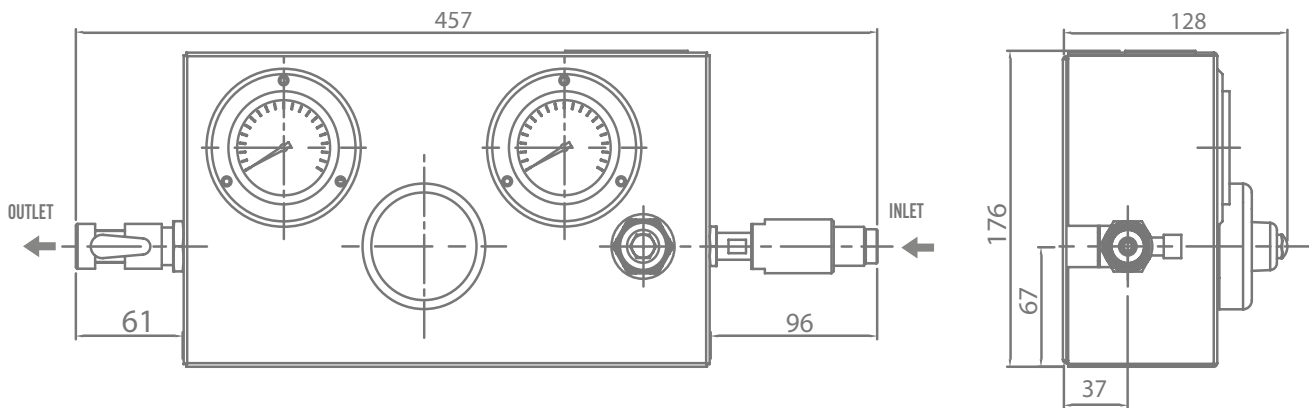

DETAILS

Connection cylinder (Fig.A.)

The connection to the gas cylinder has been designed to simplify connection operations. Through this special system, it's possible to replace the cylinder without using any tools, but simply by screwing and unscrewing with bare hands.

FIG.A

OPTIONALS / Outlet ball valve outlet cod SVASP19

Code	Gas	Inlet Pressure	Outlet Pressure	Gauge Inlet	Gauge Outlet
SRDS02004	N2	5-UNI 11144	G 3/8" M Dx	220 bar	0,5÷10 bar

Adapter or brass comedo O2 M - N2F brass adapter or connector required to use the wall-mounted unit and connect via a coil to various gas cylinders, code ARC01165.