

## DECOMPRESSION UNITS

### ENO 60

#### DECOMPRESSION UNIT TWO-STAGE LOW PRESSURE HIGH FLOW

INDUSTRIAL GASES



Specially designed for oenological applications, food and even chemical industries. This unit is for blanketing tanks by inert gas, in order to prevent oxidation of the content. Easy connection to bottle.

#### APPLICATIONS:

- Blanketing

#### FEATURES:

- Spring loaded diaphragm;
- Raccomanded for non-corrosive gases;
- Suitable for oxygen use;

#### MATERIALS


<b>Body</b>	Made of chrome-plated brass or polished Brass Cleaned and degreased for oxygen service
<b>Panel</b>	Anodised aluminium for wall mounting
<b>Knobs</b>	Plastic

#### TECHNICAL DATA

	Inert gases and oxygen	Inert gases and oxygen
<b>Working pressure</b>		Max. 250 bar
<b>Inlet/outlet connections</b>	Threaded W21.7 x 1/14" male, right-hand	Threaded W20 x 1/14" male, left-hand
<b>Supplementary outlet connections</b>		Plugged by female cup

#### SPECIFICATION

	H2-flamable gases	O2-inert gases	NH3-ammonia
<b>Inlet port / Outlet port</b>	W20 x 1/14"	W21,7 x 1/14"	W30 x 1/14"LH
<b>Weight</b>	2,1 kg for single bottle		4,2 kg for two bottles
<b>Temperature range</b>	-20°C to + 110°C		-40°C/+65°C

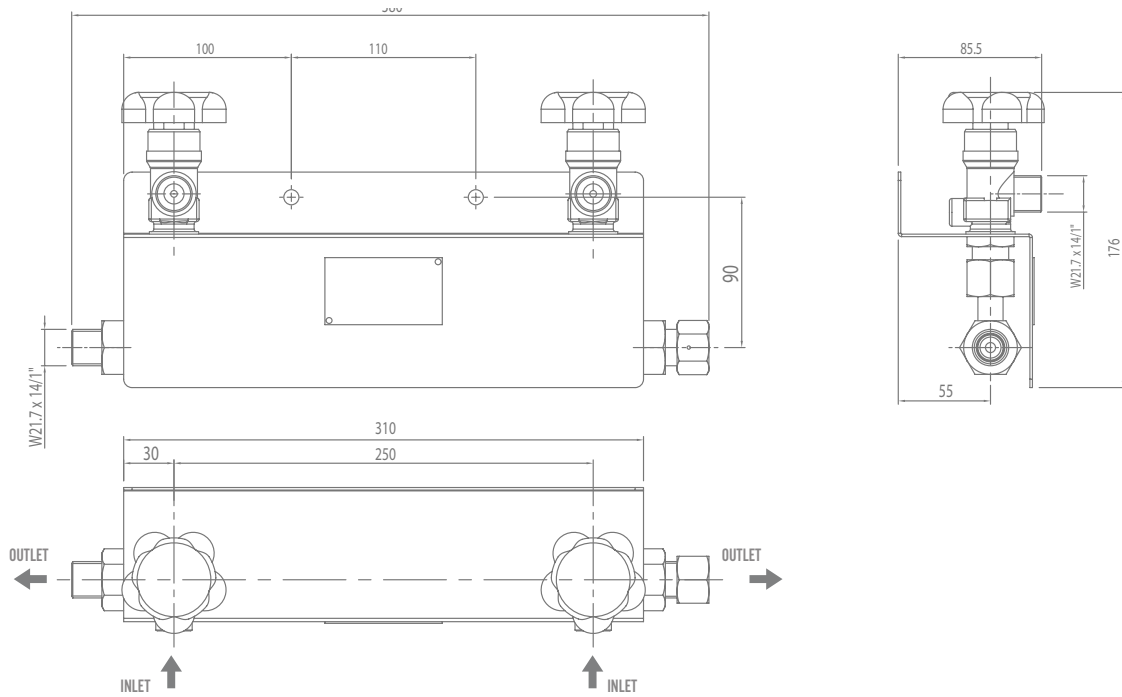

## OPTIONALS :

- Hose made of copper or flexible made of inox + kevlar

Code	Gas	Inlet Pressure	Outlet Pressure	Gauge Inlet	Gauge Outlet
SQD00110	N <sub>2</sub> - Ar - CO <sub>2</sub>	220 bar	15-40 mbar	0÷300 bar	0÷60 bar

## ACCESSORISE:

Coode	Gas	Specifications	Dimension (L)
LSC02100	N <sub>2</sub>	Copper chromed coil 8x4	1m
LSC02200	N <sub>2</sub>		2m
LSC03100	Ar		1m
LSC03200	Ar		2m

Coode	Gas	Specifications	Dimension (L)
LFG02100	N <sub>2</sub>	Flexible stainless steel braided hose with Kevlar and PTFE inner lining	1m
LFG02200	N <sub>2</sub>		2m
LFG03100	Ar		1m
LFG03200	Ar		2m