

POINT OF USE SYSTEMS

SRP 40-41

WALL-MOUNTED POINT OF USE WITH COVER, WITH FLOW-METER

INDUSTRIAL
GASES



SRP wall-mounting appliances consist of a single pressure regulator – preset at 1.5 bar - fitted into a stainless steel box for an easy and simple installation. These devices are completed by one flow-meter (SRP 40) or two flowmeters (SRP41), scaled 0-30 l/ min., for final flow rate adjustment

APPLICATIONS:

- 2nd stage decompression unit
- Welding and cutting machines

FEATURES:


- Recommended for non-corrosive technical gases, Ar, Ar/CO₂
- Wall mounting
- Ready to install wall mounting panel, modular design
- 1 inlet port, from the top - ball valve 3/8" GF
- 1 (or 2, on request) outlet port(s), from the bottom - 3/8" GM + hose
- Rubber diaphragm
- Maximum inlet pressure 25 bar (362 psig);
- Not adjustable outlet pressure;
- Adjustable outlet flow

MATERIALS

Body, bonnet	Brass barstock
Diaphragm	Rubber
Nozzle	Brass
Seat	PTFE - Kel-F
Adjust. Knob	for setting flow

TECHNICAL DATA

Type	Single stage diaphragm
Purity	Technical gases
Inlet pressure	Max. 25 bar (362 psi)
Outlet pressure	1,5 bar
Flow-meter scale	0-30 N liters/min

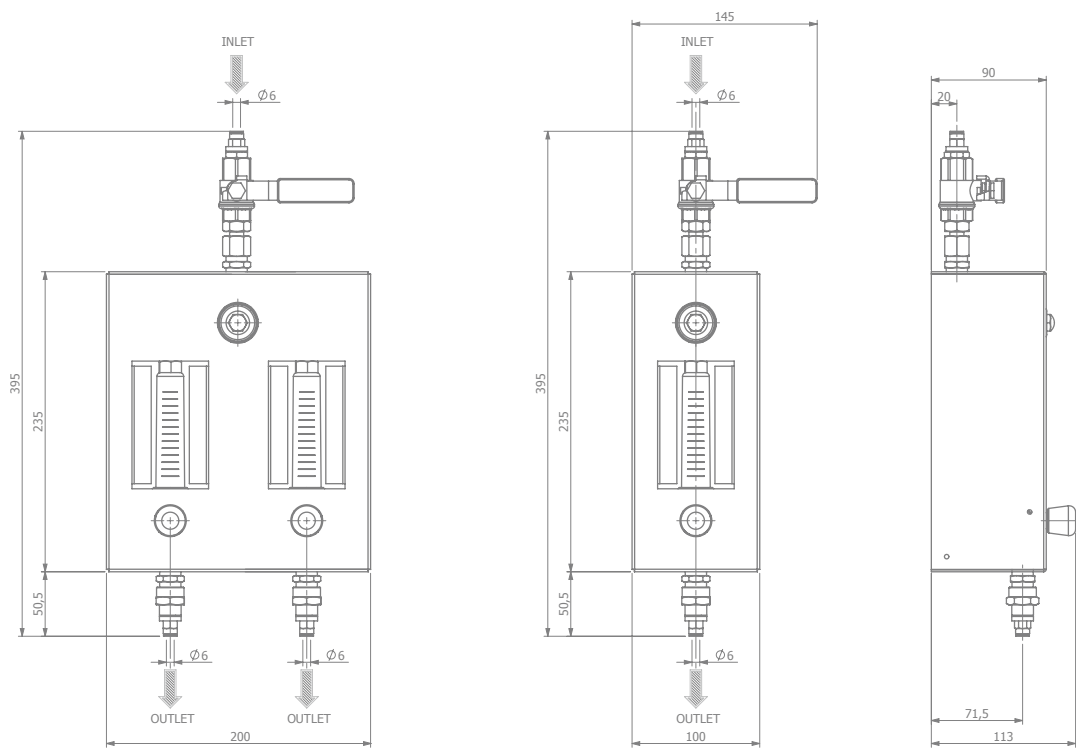

SPECIFICATIONS: For Argon, mix. Ar/CO2 and other inert gases:

Intlet/Outlet port	3/8" BSPP F	
SRP25C03AR300	Single flow-meter	Single line
SRP25C03AR310	Double flow-meter	Double line