

## GAS SUPPLY PANELS

### LHPI 300P

#### HIGH PURITY SEMI-AUTOMATIC SWITCHOVER SUPPLY PANEL

The LHPI 300P is a semi-automatic high purity switchover that prevents downtime by automatically switching the gas supply panel from the primary cylinder bank to the reserve cylinder bank. The primary bank can be resetted by turning the knob. The outlet pressure is factory pre-set.


#### APPLICATIONS:

- Laboratory pressure control;
- Research sample systems gases;
- Component testing;
- Petrochemical industry;
- Emission monitoring systems;
- Controlled atmosphere;
- Service & test equipment.

#### FEATURES:

- Recommended for non-corrosive gases purity levels up to grade 6.0 (99.9999);
- Wall mounting panel and brackets included;
- Ready to install wall mounting panel;
- Metal steel diaphragm eliminates contamination from diffusion or outgassing;
- Purge function and diaphragm shut-off valves for the best results;
- Possible to connect 2 gas cylinders or gas cylinder and a gas for purging operation;
- LHPI 300PC - chrome plated body, bonnet and fittings;
- LHPI 300PS - 316L stainless steel body, bonnet and fittings;
- 1x10<sup>-9</sup> mbar l/s He inboard helium leak rate to maintain gas purity levels;
- Inlet / outlet - 1/4" FNPT;
- Maximum inlet pressure 300 bar (4350 psig);
- External relief valve standard;
- Tested for use with oxygen.

PURE GASES

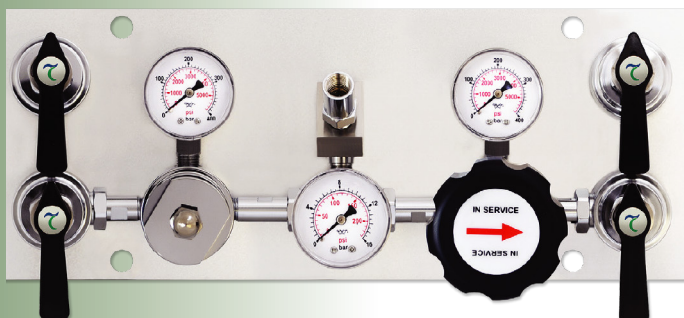

#### MATERIALS

<b>Body, bonnet</b>	316L stainless steel barstock LHPI 300PS or chrome plated brass barstock LHPI 800PC
<b>Diaphragm (regulator)</b>	Hastelloy® * C276
<b>Diaphragm (valve)</b>	Elgiloy®**
<b>Nozzle</b>	316L stainless steel
<b>Seat</b>	PEEK
<b>Seals O-ring</b>	Viton® *** (FKM)
<b>Filter</b>	SS 316L
<b>Adjust. Knob</b>	ABS plastic


\* Hastelloy® is a registered trademark name of Haynes International, Inc

\*\* Elgiloy® a registered trademark of Elgiloy Specialty Metals

\*\*\* Viton® is a registered trademark of The Chemours Company


#### TECHNICAL DATA

<b>Panel type</b>	Semi-automatic switchover supply panel
<b>Regulator type</b>	Single stage
<b>Purity</b>	Up to 6.0
<b>Inlet pressure</b>	Max. 300 bar (4350 psi)
<b>Outlet pressure</b>	2/4/10/20 bar (29/58/145/290 psi)
<b>Purge function</b>	Yes
<b>Oxygen use</b>	Suitable

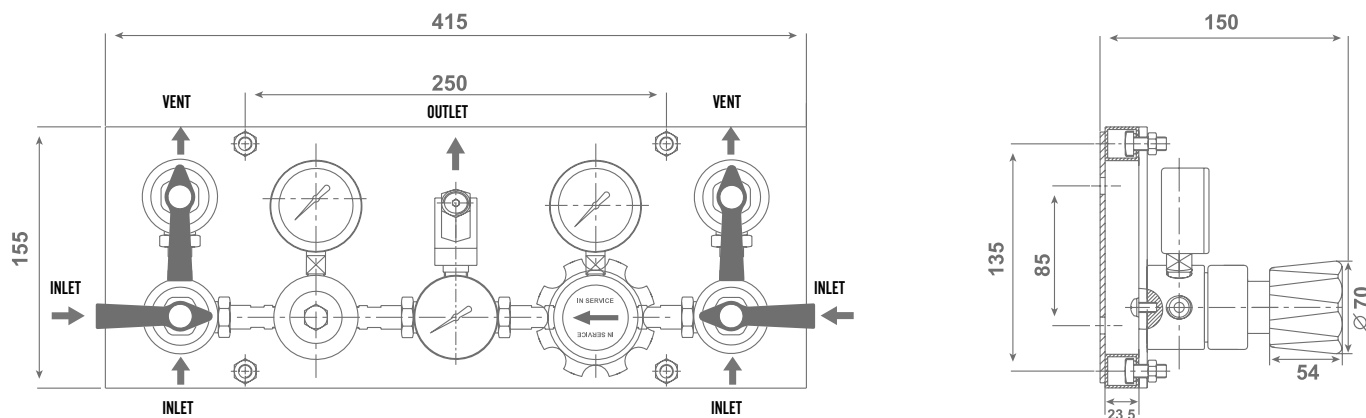

## SPECIFICATIONS

Inlet / outlet ports	1/4" NPT-F
Weight	4,8 kg
Temperature range	-30°C to +74°C

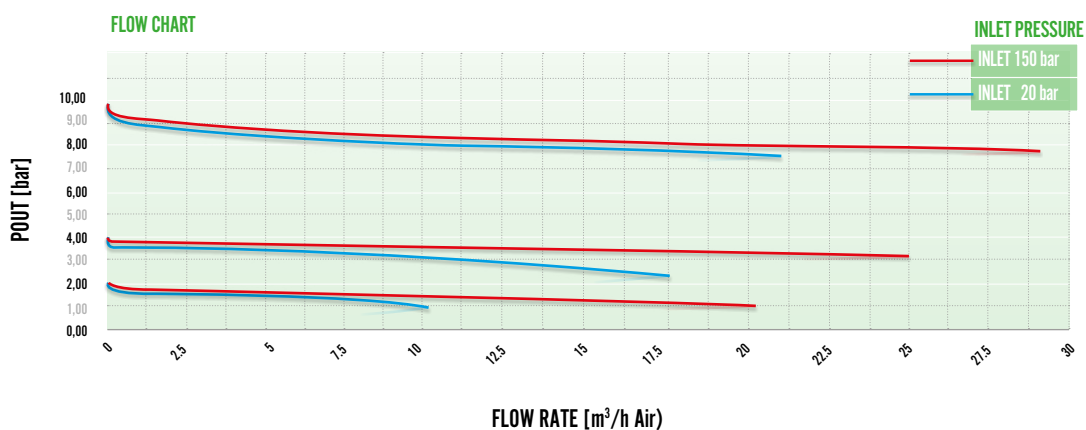

## RELATED OPTIONS

- HAS - 2 - two connection
- 4 - two connection
- 6 - two connection

## EXTENSIONS

