

PRESSURE REGULATORS

Stainless steel

TCR 6X III SERIE

STANDARD SERIES FROM 1/4" TO 1", 60 BAR

OIL & GAS



Pressure Regulators made of stainless steel 316 L designed and manufactured for heavy-duty applications. Control system with convoluted diaphragm for the best stability and precision. Balanced poppet-valve (shutter) to keep the outlet pressure almost constant and independent from fluctuation of inlet pressure. Self-relieving execution for exhausting over-pressure, just for compressed air application. Outlet pressure range till to 50 bar (725 psi). Adjusting by screw with hex. head. Connections for outlet pressure gauge on both the sides Special version (i.e. no self-relieving for gases and liquid) on request.

Important: filter upstream the press. reg. is strictly recommended

APPLICATIONS:

- Pharmaceutical industry;
- Chemical industry;
- Oil & gas and Off Shore applications
- Food industry

FEATURES:

- Particular attention to the low level of roughness of surfaces, to grant high standard of cleaning;
- Compatible for use in aggressive environment;
- Suitable for extreme temperatures (-60°C), critical environments, hazardous applications;
- Suitable to be cleaned and sanitized by the most common processes;

MATERIALS


Body, bonnet	316L stainless steel
Seals	NBR – EPDM - FKM - Silicone
Diaphragm	NBR – EPDM - FKM - Silicone
Internal parts	316L stainless steel
Shutter	PU - NBR – EPDM - FKM - Silicone

TECHNICAL DATA

	3/4" SERIE III	1" SERIE III
Port thread	3/4" BSPP F – 3/4" NPT F	1" BSPP F – 1" NPT F
P. max Inlet	60 Bar (50 bar Temp > 80°C)	
Range outlet pressure	0.3-3 / 0.5-8 / 0.5-17.2 / 2.5-25 / 5-50 Bar 4.4-44 / 7.2-116 / 7.2-250 / 36-362 / 72.5-725 Psi	
Gauge connections	1/4" BSP F – 1/4" NPT F	
Self-relieving port	1/8" GF	1/8" BSP F
Flow rate*	290 Nm ³ /h – 4800 dm ³ /min	370 Nm ³ /h – 6166 dm ³ /min
Kv*	Kv = 4.23 Nm ³ /h (EN 60534)	
Weight	1.6kg/3lb	2.3kg/5lb
Working temp.	-25°C to +110°C (HNBR) / -50°C to +130°C (EPDM) / -60°C to +230°C Silicone / -20°C to +200°C FKM (optional)	
Conformity to Directives	2014/34/EU ATEX - ASTM A182 Nace MR0.175 - 2014/68/EU PED	


*) P_{IN} 10bar, P_{OUT} 6.3bar, ΔP 1bar

Stainless steel

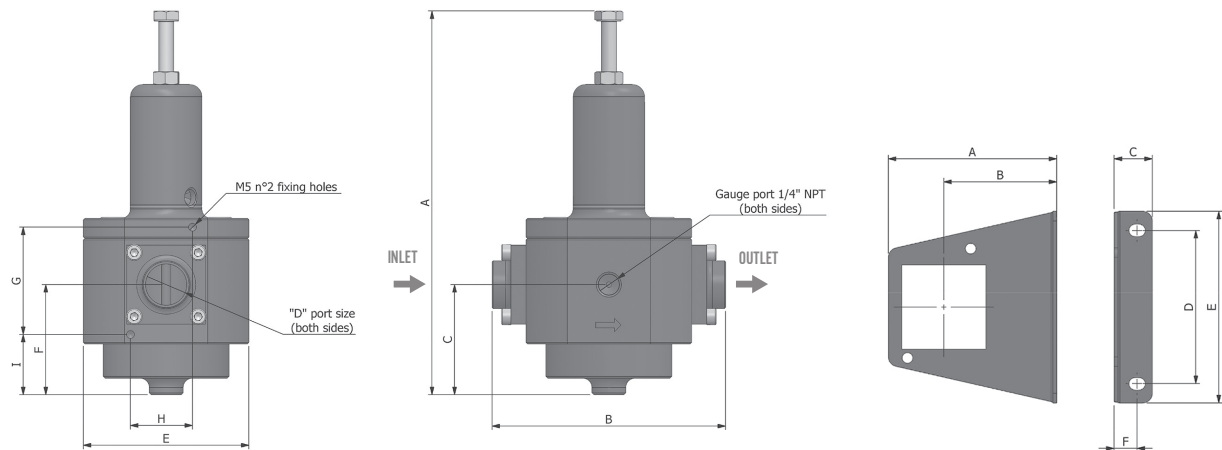

SIZE	A	B	C	D	E	F	G	H	I
3/4"-1"	204	124	59	3/4-1"	88	59	57	33	32

SIZE	A	B	C	D	E	F
1/4"	88	59	20	80	100	12

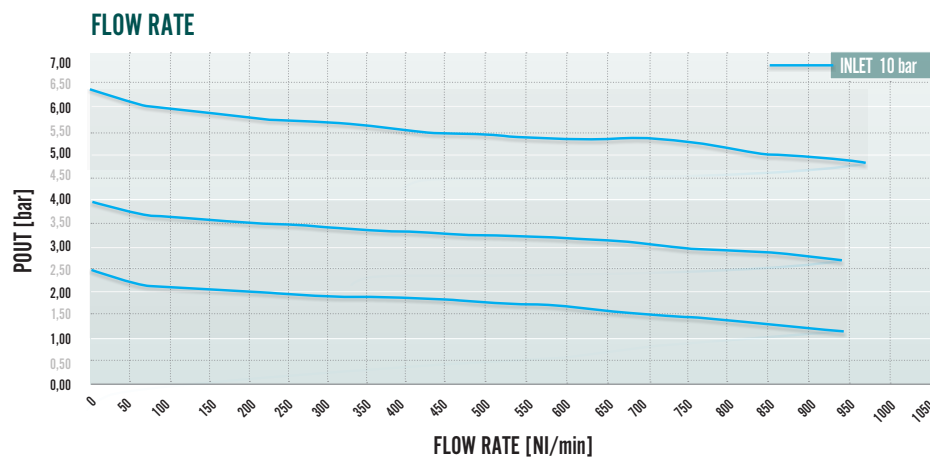

OPTIONALS :

- Bracket
- Gauge
- Flanges (EN1092-1 / ANSI)
- Without reliving
- Dome loaded execution
- Threaded connection for exhausting gas on bonnet